

Family list

4 family members for:

WO0205255

Derived from 4 applications.

- 1 **Current driven electrooptical device, E.G. Organic electroluminescent display, with complementary driving transistors to counteract threshold voltage variation**
Publication info: **CN1388952T T** - 2003-01-01
- 2 **Current driven electrooptical device, e.g. organic electroluminescent display, with complementary driving transistors to counteract threshold voltage variations**
Publication info: **EP1170719 A1** - 2002-01-09
- 3 **Circuit, driver circuit, electro-optical device, organic electroluminescent display device electronic apparatus, method of controlling the current supply to a current driven element, and method for driving a circuit**
Publication info: **US2002021293 A1** - 2002-02-21
- 4 **CURRENT DRIVEN ELECTROOPTICAL DEVICE, E.G. ORGANIC ELECTROLUMINESCENT DISPLAY, WITH COMPLEMENTARY DRIVING TRANSISTORS TO COUNTERACT THRESHOLD VOLTAGE VARIATION**
Publication info: **WO0205255 A1** - 2002-01-17

Data supplied from the esp@cenet database - Worldwide**BEST AVAILABLE COPY**

**(19) World Intellectual Property Organization
International Bureau**



(43) International Publication Date
17 January 2002 (17.01.2002)

(10) International Publication Number
WO 02/05255 A1



(51) International Patent Classification?: G09G 3/32 (72) Inventor; and
 (21) International Application Number: PCT/GB01/03100 (75) Inventor/Applicant (for US only): TAM, Simon
 [GB/GB]; 8c King's Parade, Cambridge CB2 1SJ (GB).
 (22) International Filing Date: 9 July 2001 (09.07.2001) (74) Agent: STURT, Clifford, Mark; Miller Sturt Kenyon, 9
 John Street, London WC1N 2ES (GB).
 (25) Filing Language: English
 (26) Publication Language: English (81) Designated States (national): CN, KR, US.
 (30) Priority Data: Published:
 00168153 7 July 2000 (07.07.2000) GB — with international search report

(71) Applicant (for all designated States except US): SEIKO EPSON CORPORATION [JP/JP]; 4-1, Nishi-shinjuku 2-chome, Shinjuku-ku, Tokyo 160-0811 (JP).
 For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CURRENT DRIVEN ELECTROOPTICAL DEVICE, E.G. ORGANIC ELECTROLUMINESCENT DISPLAY, WITH COMPLEMENTARY DRIVING TRANSISTORS TO COUNTERACT THRESHOLD VOLTAGE VARIATION

(57) Abstract: A driver circuit comprises a p-channel transistor and an n-channel transistor connected as a complementary pair of transistors to provide analog control of the drive current for a current driven element, preferably an organic electroluminescent element (OEL element). The transistors, being of opposite channel, compensate for any variation in threshold voltage ΔV_T and therefore provide a drive current to the OEL element which is relatively independent of ΔV_T . The complementary pair of transistors can be applied to either voltage driving or current driving pixel driver circuits.

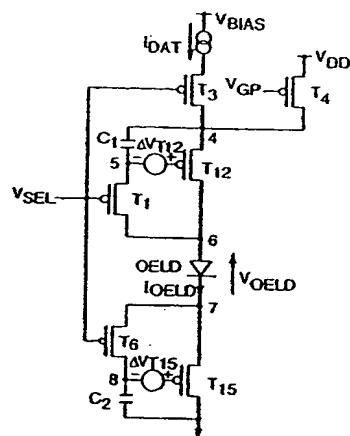

WO 02/05255 A1

CURRENT DRIVEN ELECTROOPTICAL DEVICE, E.G. ORGANIC ELECTROLUMINESCENT DISPLAY, WITH COMPLEMENTARY DRIVING TRANSISTORS TO COUNTERACT THRESHOLD VOLTAGE VARIATION

The present invention relates to a driver circuit. One particular application of such a driver circuit is for driving an organic electroluminescent element.

An organic electroluminescent (OEL) element comprises a light emitting material layer sandwiched between an anode layer and a cathode layer. Electrically, this element operates like a diode. Optically, it emits light when forward biased and the intensity of the emission increases with the forward bias current. It is possible to construct a display panel with a matrix of OEL elements fabricated on a transparent substrate and with at least one of the electrode layers being transparent. It is also possible to integrate the driving circuit on the same panel by using low temperature polysilicon thin film transistor (TFT) technology.

In a basic analog driving scheme for an active matrix OEL display, a minimum of two transistors are required per pixel. Such a driving scheme is illustrated in Figure 1. Transistor T_1 is provided to address the pixel and transistor T_2 is provided to convert a data voltage signal V_{Data} into current which drives the OEL element at a designated brightness. The data signal is stored by a storage capacitor $C_{storage}$ when the pixel is not addressed. Although p-channel TFTs are shown in the figure, the same principle can also be applied for a circuit utilising n-channel TFTs.

There are problems associated with TFT analog circuits and OEL elements do not act like perfect diodes. The light emitting material does, however, have relatively uniform characteristics. Due to the nature of the TFT fabrication technique, spatial variation of the

TFT characteristics exists over the extent of the display panel. One of the most important considerations in a TFT analog circuit is the variation of threshold voltage, ΔV_T , from device to device. The effect of such variation in an OEL display, exacerbated by the non perfect diode behaviour, is the non-uniform pixel brightness over the display area of the panel, which seriously affects the image quality. Therefore, a built-in circuit for compensating a dispersion of transistor characteristics is required.

A circuit shown in figure 2 is proposed as one of built-in for compensating a variation of transistor characteristics. In this circuit, transistor T_1 is provided for addressing the pixel. Transistor T_2 operates as an analog current control to provide the driving current to the OEL element. Transistor T_3 connects between the drain and gate of transistor T_2 and toggles transistor T_2 to act either as a diode or in a saturation mode. Transistor T_4 acts as a switch in response to an applied waveform V_{GP} . Either Transistor T_1 or transistor T_4 can be ON at any one time. Initially, at time t_0 shown in the timing diagram of Figure 2, transistors T_1 and T_3 are OFF, and transistor T_4 is ON. When transistor T_4 is OFF, transistors T_1 and T_3 are ON, and a current I_{DAT} of known value is allowed to flow into the OEL element, through transistor T_2 . This is the programming stage because the threshold voltage of transistor T_2 is measured with transistor T_3 turned ON which shorts the drain and gate of transistor T_2 . Hence transistor T_2 operates as a diode while the programming current is allowed to flow through transistors T_1 and T_2 and into the OEL element. The detected threshold voltage of transistor T_2 is stored by a capacitor C_1 connected between the gate and source terminals of transistor T_2 when transistors T_3 and T_1 are switched OFF. Transistor T_4 is then turned ON by driving waveform V_{GP} and the current through the OEL

element is now provided by supply V_{DD} . If the slope of the output characteristics for transistor T_2 were flat, the reproduced current would be the same as the programmed current for any threshold voltage of T_2 detected and stored in capacitor C_1 . However, by turning ON transistor T_4 , the drain-source voltage of transistor T_2 is pulled up, so a flat output characteristic will maintain the reproduced current at the same level as the programmed current. Note that ΔV_{T2} shown in figure 2 is imaginary, not real. It has been used solely to represent the threshold voltage of transistor T_2 .

A constant current is provided, in theory, during a subsequent active programming stage, which is signified by the time interval t_2 to t_5 in the timing diagram shown in figure

2. The reproduction stage starts at time t_6 .

The circuit of Figure 2 does provide an improvement over the circuit shown in Figure 1 but variations in the threshold value of the control transistor are not fully compensated and variations in image brightness over the display area of the panel remain.

The present invention seeks to provide an improved driver circuit. In its application to OEL elements the present invention seeks to provide an improved pixel driver circuit in which variations in the threshold voltages of the pixel driver transistor can be further compensated, thereby providing a more uniform pixel brightness over the display area of the panel and, therefore, improved image quality.

According to a first aspect of the present invention there is provided a driver circuit for a current driven element, the circuit comprising an n-channel transistor and a complementary p-channel transistor connected so as to operatively control, in combination, the current supplied to the current driven element.

Beneficially, the current driven element is an electroluminescent element.

Preferably, the driver circuit also comprises respective storage capacitors for the n-channel and p-channel transistors and respective switching means connected so as to establish when operative respective paths to the n-channel and p-channel transistors for respective data voltage pulses.

Advantageously, the driver circuit may also comprise respective storage capacitors for storing a respective operating voltage of the n-channel and the p-channel transistors during a programming stage, a first switching means connected so as to establish when operative a first current path from a source of current data signals through the n-channel and p-channel transistors and the current driven element during the programming stage, and a second switching means connected to establish when operative a second current path through the n-channel and p-channel transistors and the current driven element during a reproduction stage.

In a further embodiment, the first switching means and the source of current data signals are connected so as to provide when operative a current source for the current driven element.

In an alternative embodiment, the first switching means the source of current data signals are connected so as to provide when operative a current sink for the current driven element.

According to a second aspect of the present invention there is also provided a method of controlling the supply current to a current driven element comprising providing an n-channel transistor and a p-channel transistor connected so as to operatively control, in combination, the supply current to the current driven element.

Preferably, the method further comprises providing respective storage capacitors for the n-channel and p-channel transistors and respective switching means connected so as to

establish when operative respective paths to the n-channel and p-channel transistors for respective data voltage pulses thereby to establish, when operative, a voltage driver circuit for the current driven element.

Advantageously, the method may comprise providing a programming stage during which the n-channel and p-channel transistors are operated in a first mode and wherein a current path from a source of current data signals is established through the n-channel and the p-channel transistors and the current driven element and wherein a respective operating voltage of the n-channel transistor and the p-channel transistor is stored in respective storage capacitors, and a reproduction stage wherein a second mode and a second current path is established through the n-channel transistor and the p-channel transistor and the current driven element.

Beneficially, the present invention provides a method of controlling the supply current to an electroluminescent display comprising the method of the invention as described above wherein the current driven element is an electroluminescent element.

According to a third aspect of the present invention, there is also provided an organic electroluminescent display device comprising a driver circuit as claimed in any one of claims 1 to 12.

The present invention will now be described by way of further example only and with reference to the accompanying drawings in which:-

Fig. 1 shows a conventional OEL element pixel driver circuit using two transistors;

Fig. 2 shows a known current programmed OEL element driver circuit with threshold voltage compensation;

Fig. 3 illustrates the concept of a driver circuit including a complementary pair of driver transistors for providing threshold voltage compensation in accordance with the present invention;

Fig. 4 shows plots of characteristics for the complementary driver transistors illustrated in Fig. 3 for various levels of threshold voltages;

Fig. 5 shows a driver circuit arranged to operate as a voltage driver circuit in accordance with a first embodiment of the present invention.

Fig. 6 shows a driver circuit arranged to operate as a current programmed driver circuit in accordance with a second embodiment of the present invention;

Fig. 7 shows a current programmed driver circuit in accordance with a third embodiment of the present invention;

Figs 8 to 11 show SPICE simulation results for the circuit illustrated in Fig. 6;

Fig. 12 is a schematic sectional view of a physical implementation of an OEL element and driver according to an embodiment of the present invention;

Fig. 13 is a simplified plan view of an OEL element OEL display panel incorporating the present invention;

Fig. 14 is a schematic view of a mobile personal computer incorporating a display device having a driver according to the present invention;

Fig. 15 is a schematic view of a mobile telephone incorporating a display device having a driver according to the present invention,

Fig. 16 is a schematic view of a digital camera incorporating a display device having a driver according to the present invention,

Fig. 17 illustrates the application of the driver circuit of the present invention to a magnetic RAM, and

Fig. 18 illustrates an alternative application of the driver circuit of the present invention to a magnetic RAM, and

Fig. 19 illustrates the application of the driver circuit of the present invention to a magnetoresistive element.

The concept of a driver circuit according to the present invention is illustrated in Fig. 3. An OEL element is coupled between two transistors T_{12} and T_{15} which operate, in combination, as an analog current control for the current flowing through the OEL element. Transistor T_{12} is a p-channel transistor and transistor T_{15} is an n-channel transistor which act therefore, in combination, as a complementary pair for analog control of the current through the OEL element.

As mentioned previously, one of the most important parameters in a TFT analog circuit design is the threshold voltage V_T . Any variation, ΔV_T within a circuit has a significant effect on the overall circuit performance. Variations in the threshold voltage can be viewed as a rigid horizontal shift of the source to drain current versus the gate to source voltage characteristic for the transistor concerned and are caused by the interface charge at the gate of the transistor.

It has been realised with the present invention that in an array of TFT devices, in view of the fabrication techniques employed, neighbouring or relatively close TFT's have a high probability of exhibiting the same or an almost similar value of threshold voltage ΔV_T . Furthermore, it has been realised that as the effects of the same ΔV_T on p-channel and n-channel TFT's are complementary, compensation for variations in threshold voltage ΔV_T can be achieved by employing a pair of TFT's, one p-channel TFT and one n-channel TFT, to provide analog control of the driving current flowing to the OEL element. The driving

current can, therefore, be provided independently of any variation of the threshold voltage. Such a concept is illustrated in figure 3.

Figure 4 illustrates the variation in drain current, that is the current flowing through the OEL element shown in figure 3, for various levels of threshold voltage ΔV_T , ΔV_{T1} , ΔV_{T2} for the transistors T_{12} and T_{15} . Voltages V_1 , V_2 and V_D are respectively the voltages appearing across transistor T_{12} , T_{15} and the OEL element from a voltage source V_{DD} . Assuming that the transistors T_{12} and T_{15} have the same threshold voltage and assuming that $\Delta V_T = 0$, then the current flowing through the OEL element is given by cross-over point A for the characteristics for the p-channel transistor T_{12} and the n-channel transistor T_{15} shown in figure 4. This is shown by value I_0 .

Assuming now that the threshold voltage of the p-channel and n-channel transistors changes to ΔV_{T1} , the OEL element current I_1 is then determined by crossover point B. Likewise, for a variation in threshold voltage to ΔV_2 , the OEL element current I_2 is given by crossover point C. It can be seen from figure 4 that even with the variations in the threshold voltage there is minimal variation in the current flowing through the OEL element.

Figure 5 shows a pixel driver circuit configured as a voltage driver circuit. The circuit comprises p-channel transistor T_{12} and n-channel transistor T_{15} acting as a complementary pair to provide, in combination, an analog current control for the OEL element. The circuit includes respective storage capacitors C_{12} and C_{15} and respective switching transistors T_A and T_B coupled to the gates of transistors T_{12} and T_{15} . When transistors T_A and T_B are switched ON data voltage signals V_1 and V_2 are stored respectively in storage capacitors C_{12} and C_{15} when the pixel is not addressed. The transistors T_A and T_B

function as pass gates under the selective control of addressing signals ϕ_1 and ϕ_2 applied to the gates of transistors T_A and T_B .

Figure 6 shows a driver circuit according to the present invention configured as a current programmed OEL element driver circuit. As with the voltage driver circuit, p-channel transistor T_{12} and n-channel transistor T_{15} are coupled so as to function as an analog current control for the OEL element. Respective storage capacitors C_1 , C_2 and respective switching transistors T_1 and T_6 are provided for transistors T_{12} and T_{15} . The driving waveforms for the circuit are also shown in figure 6. Either transistors T_1 , T_3 and T_6 , or transistor T_4 can be ON at any one time. Transistors T_1 and T_6 connect respectively between the drain and gate of transistors T_{12} and T_{15} and switch in response to applied waveform V_{SEL} to toggle transistors T_{12} and T_{15} to act either as diodes or as transistors in saturation mode. Transistor T_3 is also connected to receive waveform V_{SEL} . Transistors T_1 and T_6 are both p-channel transistors to ensure that the signals fed through these transistors are at the same magnitude. This is to ensure that any spike currents through the OEL element during transitions of the waveform V_{SEL} are kept to a minimum.

The circuit shown in figure 6 operates in a similar manner to known current programmed pixel driver circuits in that a programming stage and a display stage are provided in each display period but with the added benefit that the drive current to the OEL element is controlled by the complementary opposite channel transistors T_{12} and T_{15} . Referring to the driving waveforms shown in figure 6, a display period for the driver circuit extends from time t_0 to time t_6 . Initially, transistor T_4 is ON and transistors T_1 , T_3 and T_6 are OFF. Transistor T_4 is turned OFF at time t_1 by the waveform V_{GP} and transistors T_1 , T_3 and T_6 are turned ON at time t_3 by the waveform V_{SEL} . With transistors T_1 and T_6 turned ON, the p-channel transistor T_{12} and the complementary n-channel transistor T_{15} act in a

first mode as diodes. The driving waveform for the frame period concerned is available from the current source I_{DAT} at time t_2 and this is passed by the transistor T_3 when it switches on at time t_3 . The detected threshold voltages of transistors T_{12} and T_{15} are stored in capacitors C_1 and C_2 . These are shown as imaginary voltage sources ΔV_{T12} and ΔV_{T15} in figure 6.

Transistors T_1 , T_3 and T_6 are then switched OFF at time t_4 and transistor T_4 is switched ON at time t_5 and the current through the OEL element is then provided from the source V_{DD} under the control of the p-channel and n-channel transistors T_{12} and T_{15} operating in a second mode, i.e. as transistors in saturation mode. It will be appreciated that as the current through the OEL element is controlled by the complementary p-channel and n-channel transistors T_{12} and T_{15} , any variation in threshold voltage in one of the transistors will be compensated by the other opposite channel transistor, as described previously with respect to figure 4.

In the current programmed driver circuit shown in figure 6, the switching transistor T_3 is coupled to the p-channel transistor T_{12} , with the source of the driving waveform I_{DAT} operating as a current source. However, the switching transistor T_3 may as an alternative be coupled to the n-channel transistor T_{15} as shown in figure 7, whereby I_{DAT} operates as a current sink. In all other respects the operation of the circuit shown in figure 7 is the same as for the circuit shown in figure 6.

Figures 8 to 11 show a SPICE simulation of an improved pixel driver circuit according to the present invention.

Referring to figure 8, this shows the driving waveforms I_{DAT} , V_{GP} , V_{SEL} and three values of threshold voltage, namely -1volt, 0volts and +1volt used for the purposes of simulation to show the compensating effect provided by the combination of the p-channel

and n-channel transistors for controlling the current through the OEL element. From figure 8, it can be seen that, initially the threshold voltage ΔV_T was set at -1volt, increasing to 0volts at 0.3×10^{-4} seconds and increasing again to +1volt at 0.6×10^{-4} seconds. However, it can be seen from figure 9 that even with such variations in the threshold voltage the driving current through the OEL element remains relatively unchanged.

The relative stability in the driving current through the OEL element can be more clearly seen in figure 10, which shows a magnified version of the response plots shown in figure 9.

It can be seen from figure 10 that, using a value of 0 volts as a base for the threshold voltage ΔV_T , that if the threshold voltage ΔV_T changes to -1volts there is a change of approximately 1.2% in the drive current through the OEL element and if the threshold voltage ΔV_T is changed to +1volt, there is a reduction in drive current of approximately 1.7% compared to the drive current when the threshold voltage ΔV_T is 0 volts. The variation of drive current of 8.7% is shown for reference purposes only as such a variation can be compensated by gamma correction, which is well known in this art and will not therefore be described in relation to the present invention.

Figure 11 shows that for levels of I_{DAT} ranging from $0.2\mu A$ to $1.0\mu A$, the improved control of the OEL element drive current is maintained by the use of the p-channel and opposite n-channel transistors in accordance with the present invention.

It will be appreciated from the above description that the use of a p-channel transistor and an opposite n-channel transistor to provide, in combination, analog control of the drive current through an electroluminescent device provides improved compensation for

the effects which would otherwise occur with variations in the threshold voltage of a single p-channel or n-channel transistor.

Preferably, the TFT n-channel and p-channel transistors are fabricated as neighbouring or adjacent transistors during the fabrication of an OEL element OEL display so as to maximise the probability of the complementary p-channel and n-channel transistors having the same value of threshold voltage ΔV_T . The p-channel and n-channel transistors may be further matched by comparison of their output characteristics.

Figure 12 is a schematic cross-sectional view of the physical implementation of the pixel driver circuit in an OEL element structure. In figure 12, numeral 132 indicates a hole injection layer, numeral 133 indicates an organic EL layer, and numeral 151 indicates a resist or separating structure. The switching thin-film transistor 121 and the n-channel type current-thin-film transistor 122 adopt the structure and the process ordinarily used for a low-temperature polysilicon thin-film transistor, such as are used for example in known thin-film transistor liquid crystal display devices such as a top-gate structure and a fabrication process wherein the maximum temperature is 600°C or less. However, other structures and processes are applicable.

The forward oriented organic EL display element 131 is formed by: the pixel electrode 115 formed of Al, the opposite electrode 116 formed of ITO, the hole injection layer 132, and the organic EL layer 133. In the forward oriented organic EL display element 131, the direction of current of the organic EL display device can be set from the opposite electrode 116 formed of ITO to the pixel electrode 115 formed of Al.

The hole injection layer 132 and the organic EL layer 133 may be formed using an ink-jet printing method, employing the resist 151 as a separating structure between the pixels.

The opposite electrode 116 formed of ITO may be formed using a sputtering method.

However, other methods may also be used for forming all of these components.

The typical layout of a full display panel employing the present invention is shown schematically in figure 13. The panel comprises an active matrix OEL element 200 with analogue current program pixels, an integrated TFT scanning driver 210 with level shifter, a flexible TAB tape 220, and an external analogue driver LSI 230 with an integrated RAM/controller. Of course, this is only one example of the possible panel arrangements in which the present invention can be used.

The structure of the organic EL display device is not limited to the one described here. Other structures are also applicable.

The improved pixel driver circuit of the present invention may be used in display devices incorporated in many types of equipment such as mobile displays e.g. mobile phones, laptop personal computers, DVD players, cameras, field equipment; portable displays such as desktop computers, CCTV or photo albums; or industrial displays such as control room equipment displays.

Several electronic apparatuses using the above organic electroluminescent display device will now be described.

<1: Mobile Computer>

An example in which the display device according to one of the above embodiments is applied to a mobile personal computer will now be described.

Figure 14 is an isometric view illustrating the configuration of this personal computer. In the drawing, the personal computer 1100 is provided with a body 1104 including a keyboard 1102 and a display unit 1106. The display unit 1106 is implemented using a display panel fabricated according to the present invention, as described above.

<2: Portable Phone>

Next, an example in which the display device is applied to a display section of a portable phone will be described. Fig. 15 is an isometric view illustrating the configuration of the portable phone. In the drawing, the portable phone 1200 is provided with a plurality of operation keys 1202, an earpiece 1204, a mouthpiece 1206, and a display panel 100. This display panel 100 is implemented using a display panel fabricated according to the present invention, as described above.

<3: Digital Still Camera>

Next, a digital still camera using an OEL display device as a finder will be described. Fig. 16 is an isometric view illustrating the configuration of the digital still camera and the connection to external devices in brief.

Typical cameras sensitize films based on optical images from objects, whereas the digital still camera 1300 generates imaging signals from the optical image of an object by photoelectric conversion using, for example, a charge coupled device (CCD). The digital still camera 1300 is provided with an OEL element 100 at the back face of a case 1302 to perform display based on the imaging signals from the CCD. Thus, the display panel 100 functions as a finder for displaying the object. A photo acceptance unit 1304 including optical lenses and the CCD is provided at the front side (behind in the drawing) of the case 1302.

When a cameraman determines the object image displayed in the OEL element panel 100 and releases the shutter, the image signals from the CCD are transmitted and stored to memories in a circuit board 1308. In the digital still camera 1300, video signal output terminals 1312 and input/output terminals 1314 for data communication are provided on a side of the case 1302. As shown in the drawing, a television monitor 1430 and a personal computer 1440 are connected to the video signal terminals 1312 and the input/output terminals 1314, respectively, if necessary. The imaging signals stored in the memories of the

circuit board 1308 are output to the television monitor 1430 and the personal computer 1440, by a given operation.

Examples of electronic apparatuses, other than the personal computer shown in Fig. 14, the portable phone shown in Fig. 15, and the digital still camera shown in Fig. 16, include OEL element television sets, view-finder-type and monitoring-type video tape recorders, car navigation systems, pagers, electronic notebooks, portable calculators, word processors, workstations, TV telephones, point-of-sales system (POS) terminals, and devices provided with touch panels. Of course, the above OEL device can be applied to display sections of these electronic apparatuses.

The driver circuit of the present invention can be disposed not only in a pixel of a display unit but also in a driver disposed outside a display unit.

In the above, the driver circuit of the present invention has been described with reference to various display devices. The applications of the driver circuit of the present invention are much broader than just display devices and include, for example, its use with a magnetoresistive RAM, a capacitance sensor, a charge sensor, a DNA sensor, a night vision camera and many other devices.

Figure 17 illustrates the application of the driver circuit of the present invention to a magnetic RAM. In figure 17 a magnetic head is indicated by the reference MH.

Figure 18 illustrates an alternative application of the driver circuit of the present invention to a magnetic RAM. In figure 18 a magnetic head is indicated by the reference MH.

Figure 19 illustrates the application of the driver circuit of the present invention to a magnetoresistive element. In figure 19 a magnetic head is indicated by the reference MH. and a magnetic resistor is indicated by the reference MR.

The foregoing description has been given by way of example only and it will be appreciated by a person skilled in the art that modifications can be made without departing from the scope of the present invention.

CLAIMS

1. A driver circuit for a current driven element, the circuit comprising an n-channel transistor and a complementary p-channel transistor connected so as to operatively control, in combination, the current supplied to the current driven element.
2. A driver circuit as claimed in claim 1, wherein the complementary n-channel and p-channel transistors comprise polysilicon thin film transistors.
3. A driver circuit as claimed in claim 2, wherein the complementary n-channel and p-channel transistors are spatially arranged in close proximity to each other for providing a complementary pair of n-channel and p-channel transistors having approximately equal threshold voltages.
4. A driver circuit as claimed in any one of claims 1 to 3 connected so as to establish when operative a voltage driver circuit comprising respective storage capacitors for the n-channel and p-channel transistors and respective switching means connected so as to establish when operative respective paths to the n-channel and p-channel transistors for respective data voltage pulses.
5. A driver circuit as claimed in any one of claims 1 to 3 comprising respective storage capacitors for storing a respective operating voltage of the n-channel and the p-channel transistors during a programming stage, a first switching means connected so as to establish

when operative a first current path from a source of current data signals through the n-channel and p-channel transistors and the current driven element during the programming stage, and a second switching means connected to establish when operative a second current path through the n-channel and p-channel transistors and the current driven element during a reproduction stage.

6. A driver circuit as claimed in claim 5, wherein the first switching means and the source of current data signals are connected so as to provide when operative a current source for the current driven element.

7. A driver circuit as claimed in claim 5, wherein the first switching means and the source of current data signals are connected so as to provide when operative a current sink for the current driven element.

8. A driver circuit as claimed in any one of claims 5 to 7, further comprising respective further switching means respectively connected to bias the n-channel transistor and the p-channel transistor to act as diodes during the programming stage.

9. A driver circuit as claimed in claim 8, wherein the respective further switching means comprise p-channel transistors.

10. A driver circuit as claimed in any one of claims 5 to 9, wherein the circuit is implemented with polysilicon thin film transistors.

11. A driver circuit as claimed in claim 4, wherein the circuit is implemented using polysilicon thin film transistors.
12. A driver circuit as claimed in any preceding claim, wherein the current driven element is an electroluminescent element.
13. A method of controlling the supply current to a current driven element comprising providing an n-channel transistor and a p-channel transistor connected so as to operatively control, in combination, the supply current to the current driven element.
14. A method as claimed in claim 13, comprising the further step of providing the n-channel transistor and the p-channel transistor as polysilicon thin film transistors.
15. A method as claimed in claim 14 comprising the further step of spatially arranging the n-channel and p-channel polysilicon thin film transistors in close proximity to each other.
16. A method as claimed in any one of claims 13 to 15 comprising providing respective storage capacitors for the n-channel and p-channel transistors and respective switching means connected so as to establish when operative respective paths to the n-channel and p-channel transistors for respective data voltage pulses thereby to establish, when operative, a voltage driver circuit for the current driven element.

17. A method as claimed in any one of claims 13 to 15 comprising providing a programming stage during which the n-channel and p-channel transistors are operated in a first mode and wherein a current path from a source of current data signals is established through the n-channel and the p-channel transistors and the current driven element and wherein a respective operating voltage of the n-channel transistor and the p-channel transistor is stored in respective storage capacitors, and a reproduction stage wherein a second mode and a second current path is established through the n-channel transistor and the p-channel transistor and the current driven element.
18. A method as claimed in claim 17, wherein the first mode comprises operating the n-channel and p-channel transistors as diodes.
19. A method of controlling the supply current to an electroluminescent display comprising the method as claimed in any one of claims 13 to 18 wherein the current driven element is an electroluminescent element.
20. An organic electroluminescent display device comprising a driver circuit as claimed in any one of claims 1 to 12.
21. An electronic apparatus incorporating an organic electroluminescent display device as claimed in claim 20.
22. A circuit comprising a current driven element and at least two active elements, the current driven element being disposed between the two active elements.

23. A circuit comprising a current driven element and at least two active elements, the two active elements being connected through the current driven element together.
24. The circuit according to claim 22 or claim 23, wherein the two active elements are transistors.
25. The circuit according to claim 24, wherein the two transistors are mutually different channel type transistors.
26. the circuit according to claim 22 or claim 23, wherein the current driven element is an organic electroluminescent element.
27. The circuit according to claim 24, wherein the gates of the two transistors are each connected to a respective capacitor.
28. An electro-optical device comprising the circuit according to claim 22.
29. An electronic apparatus incorporating an electro-optical device according to claim 28.
30. A method for driving a circuit comprising a current driven element, a first active element, and a second active element that is disposed at a side of the current driven element

1/11

Fig.1.


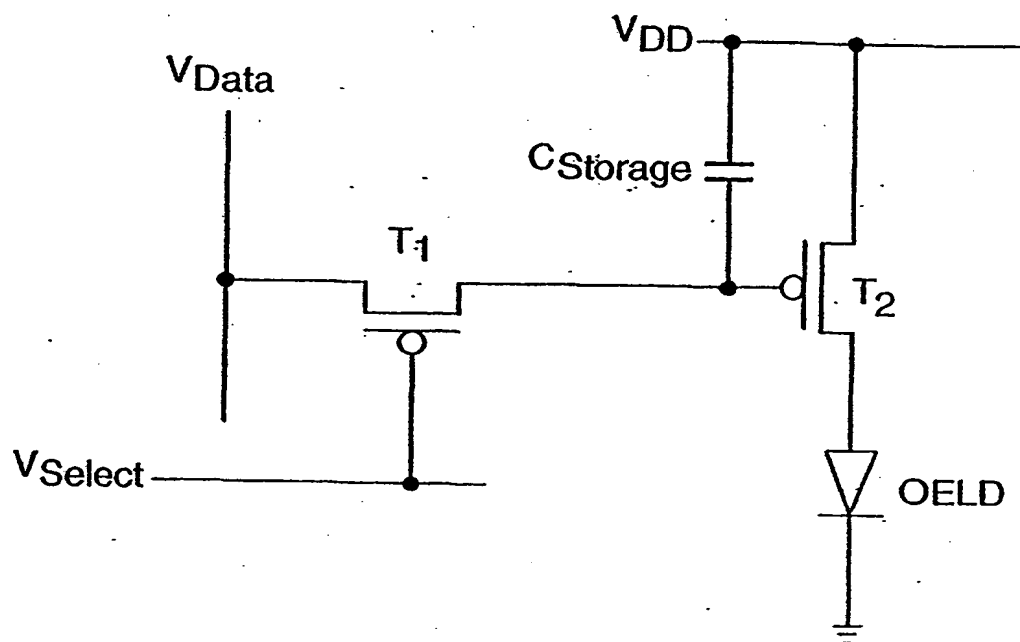


Fig.2.

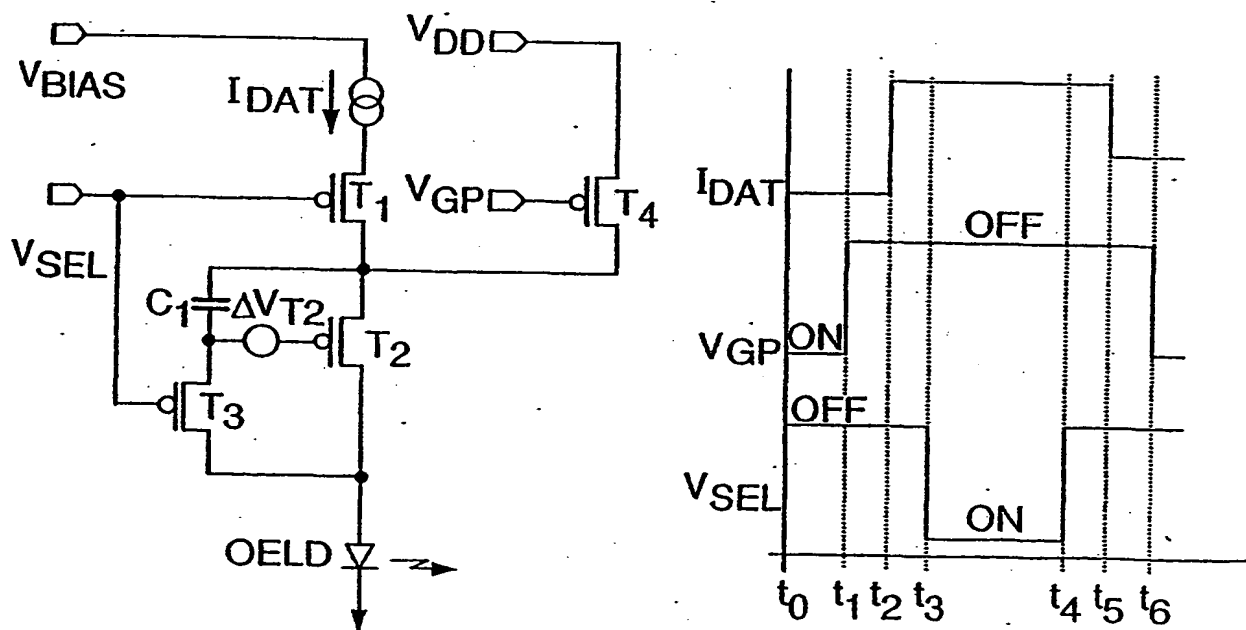

2/11

Fig.3.

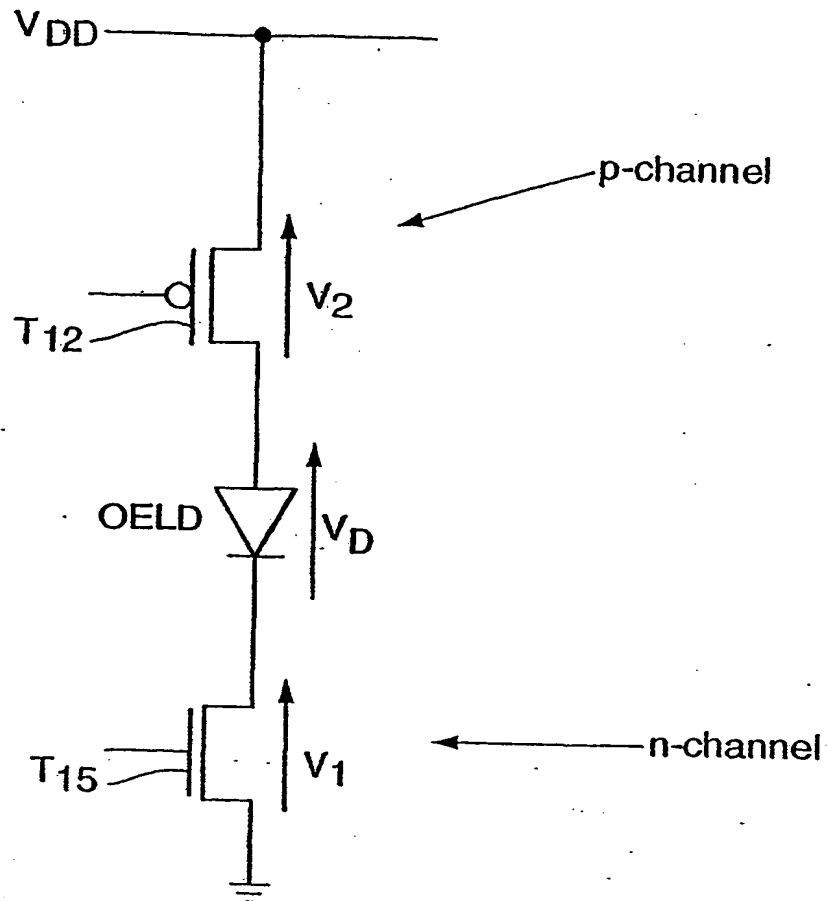


Fig.4.

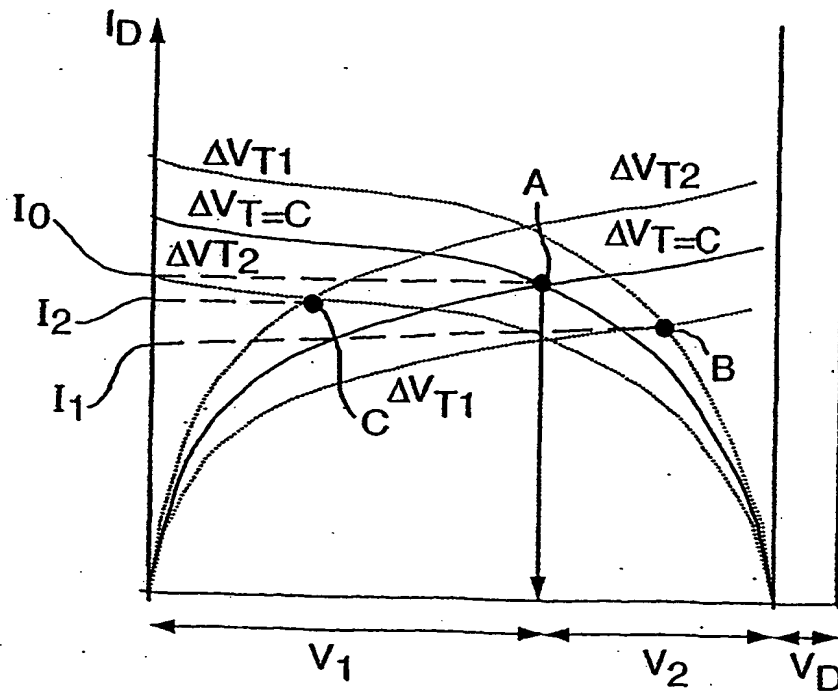


Fig.5.



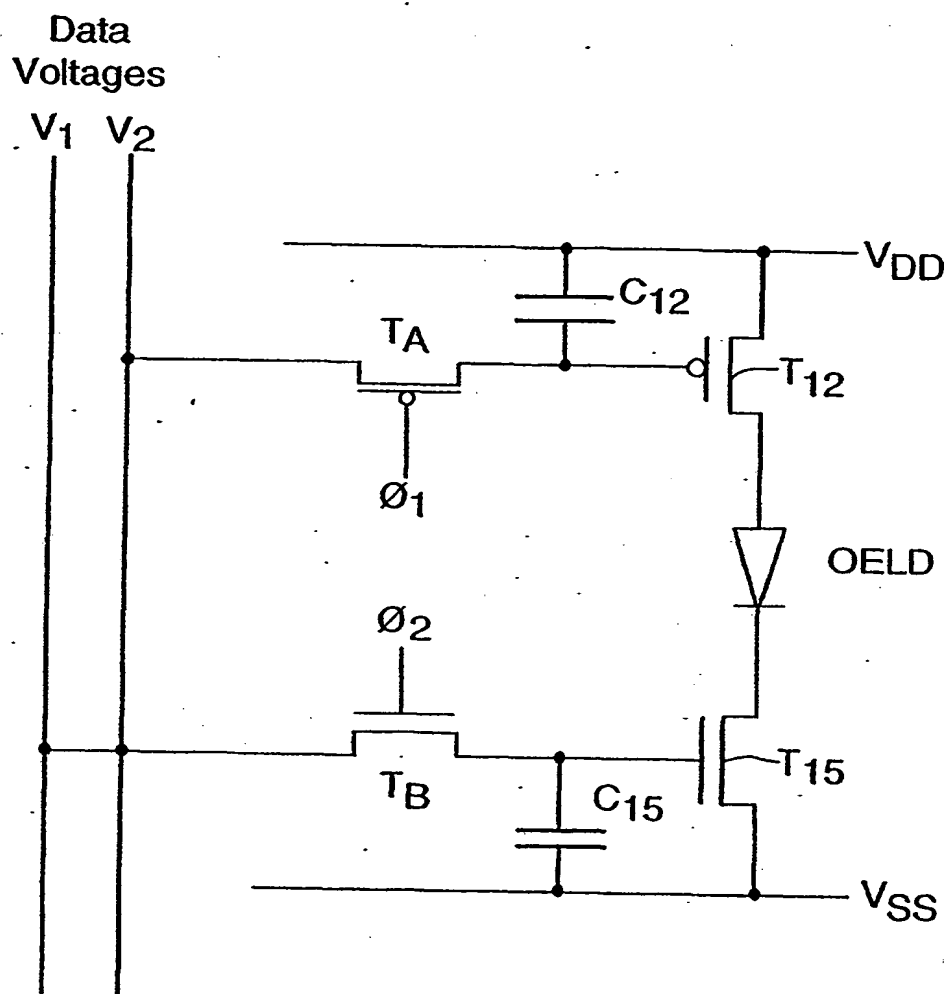


Fig.6.


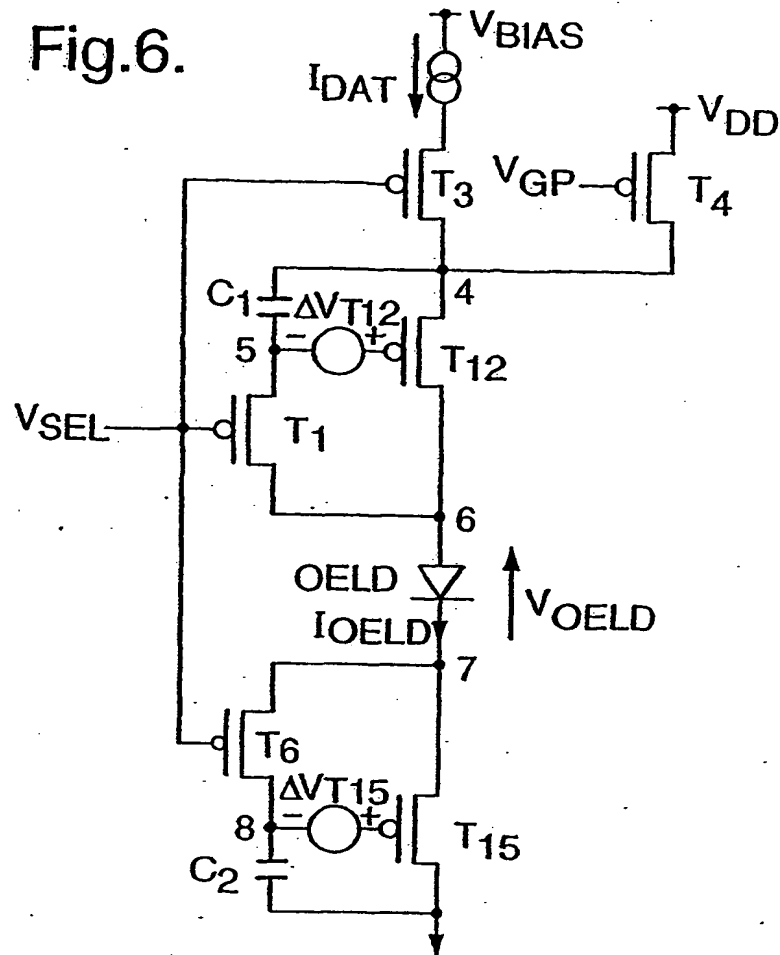


DRIVING WAVEFORM

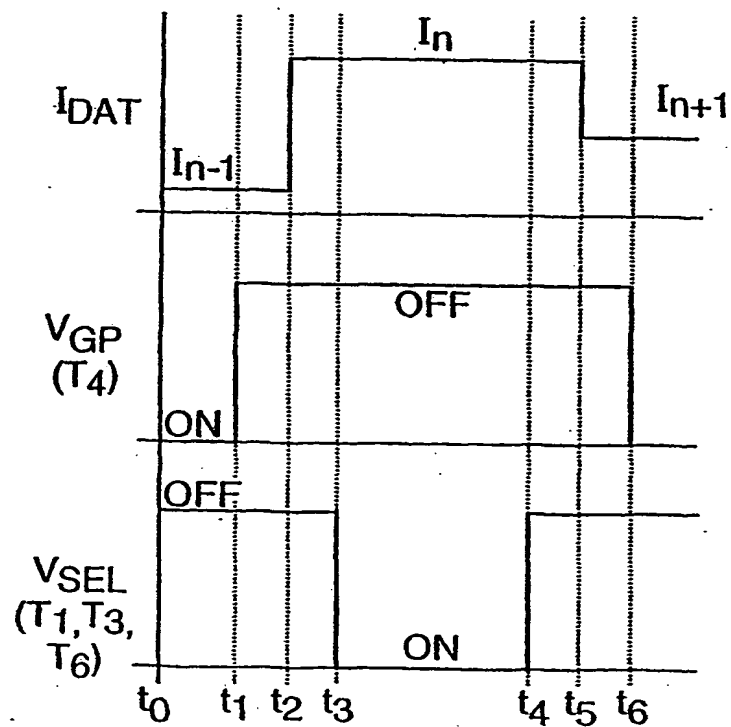

5/11

Fig.7.

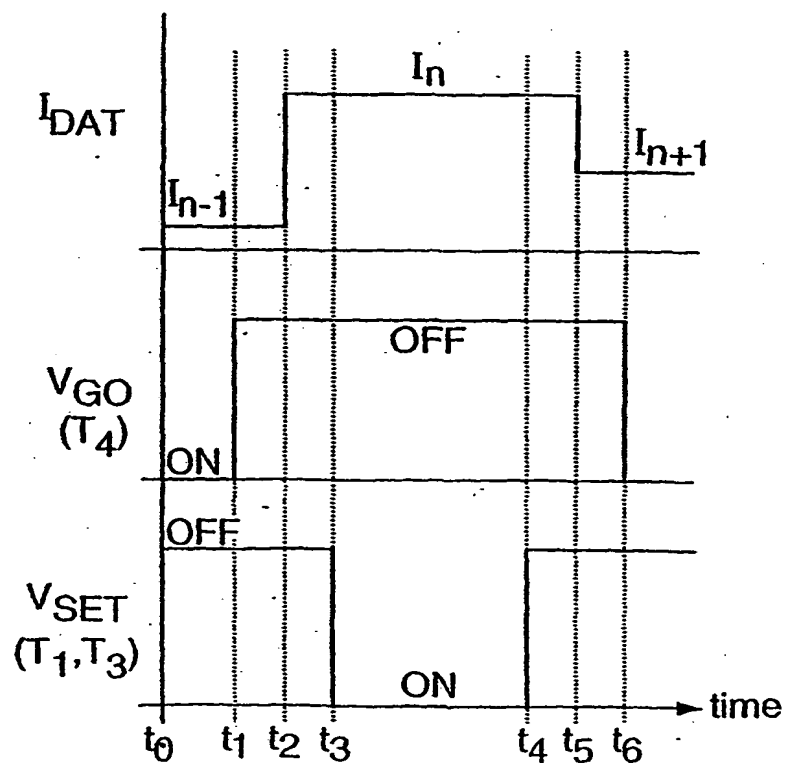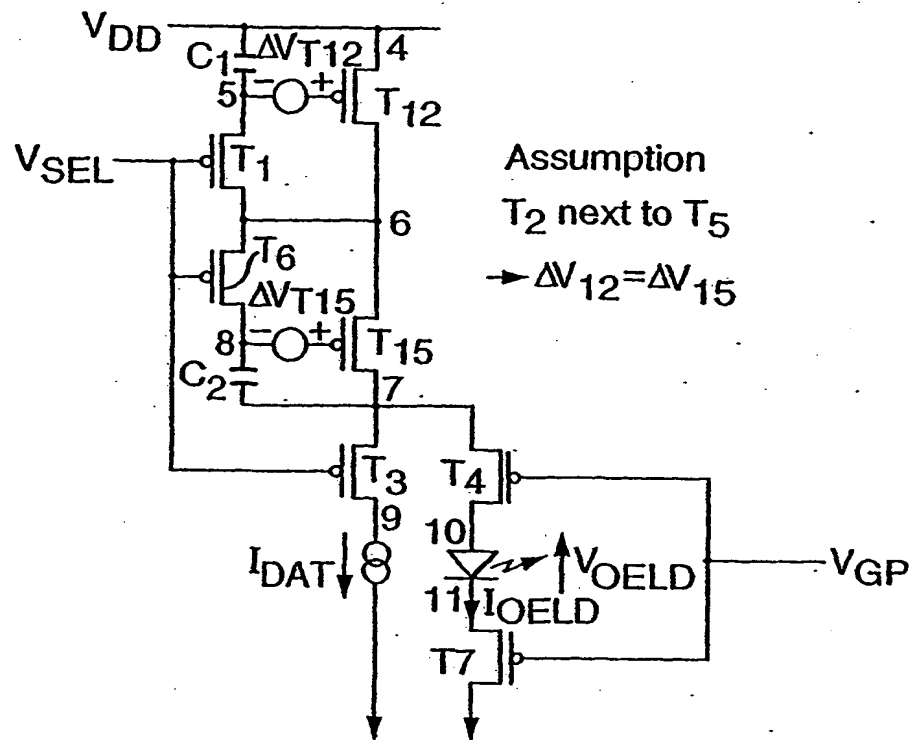

6/11

Fig.8.


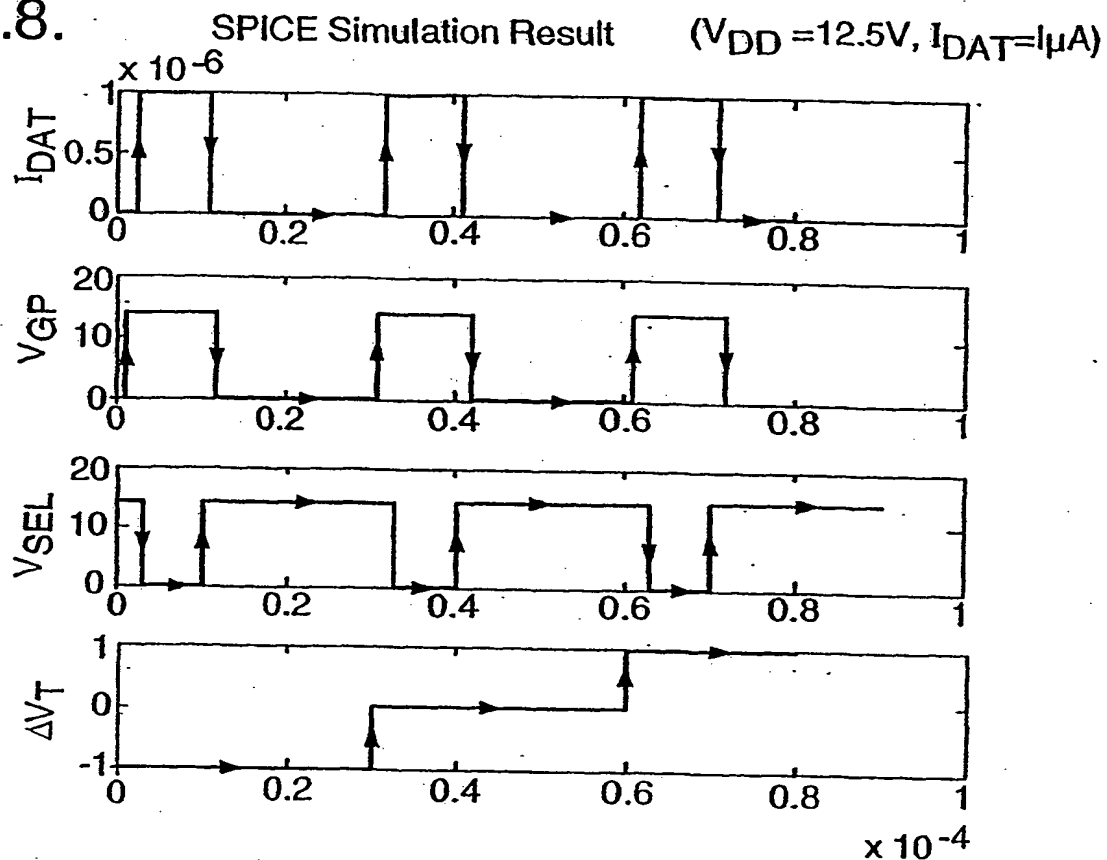


Fig.9.

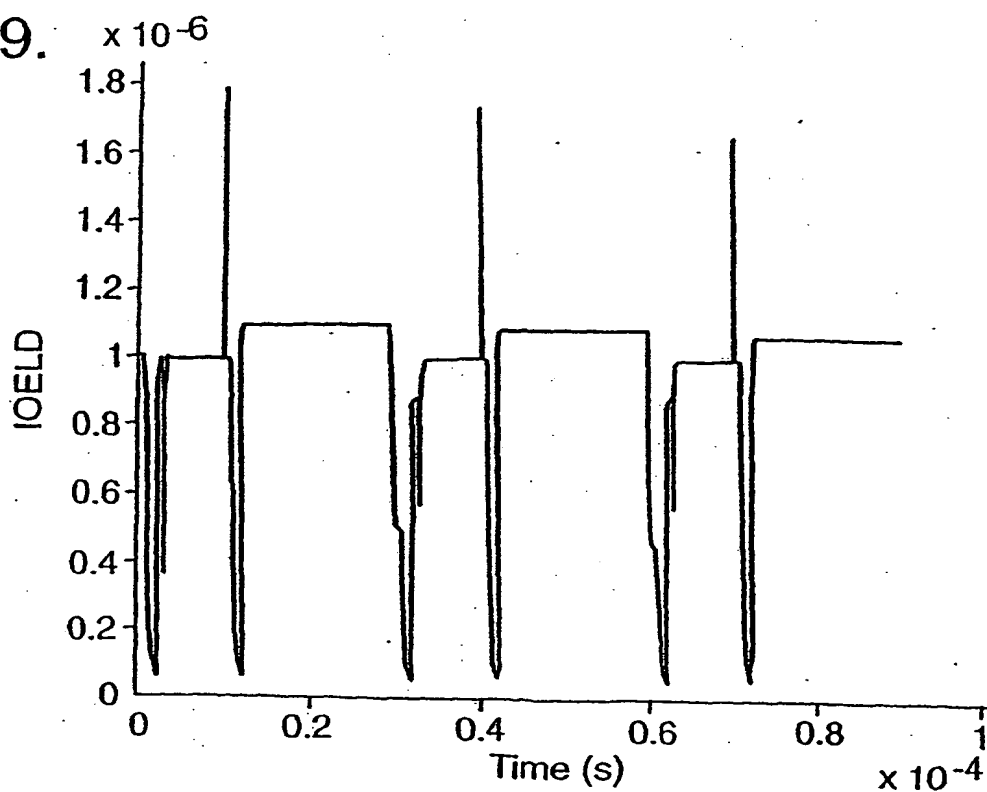

7/11

Fig.10.


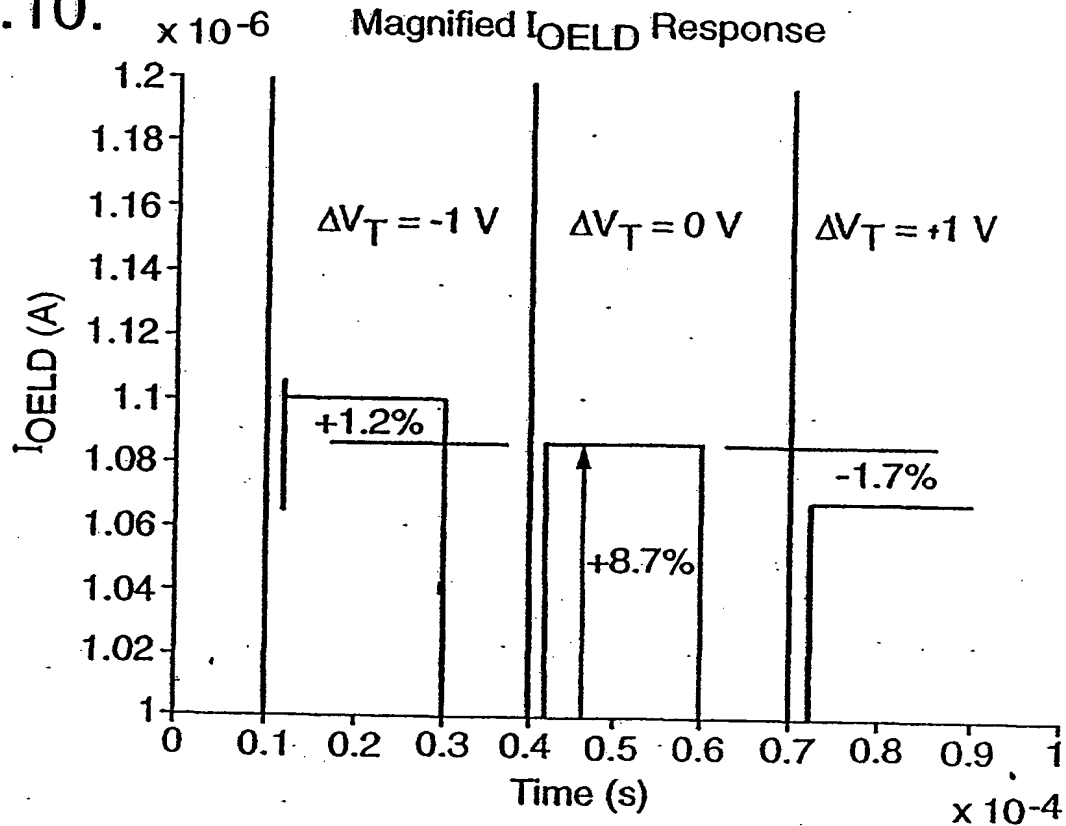


Fig.11.

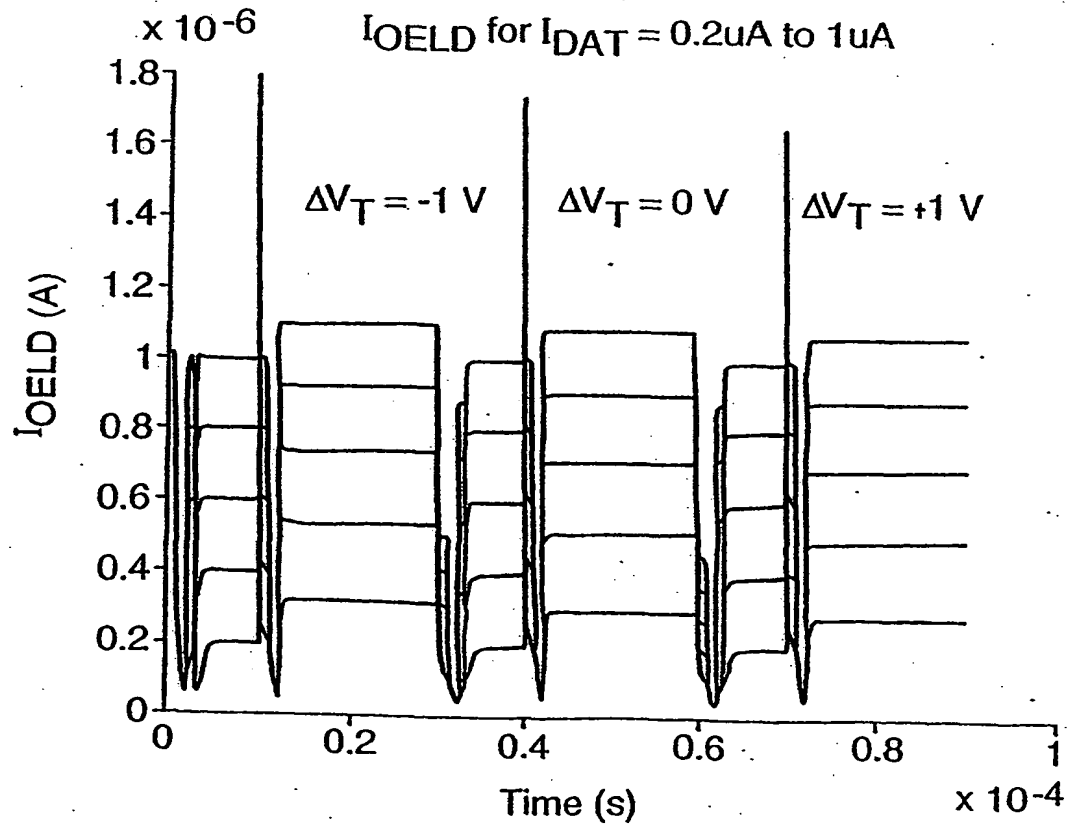

8/11

Fig.12.

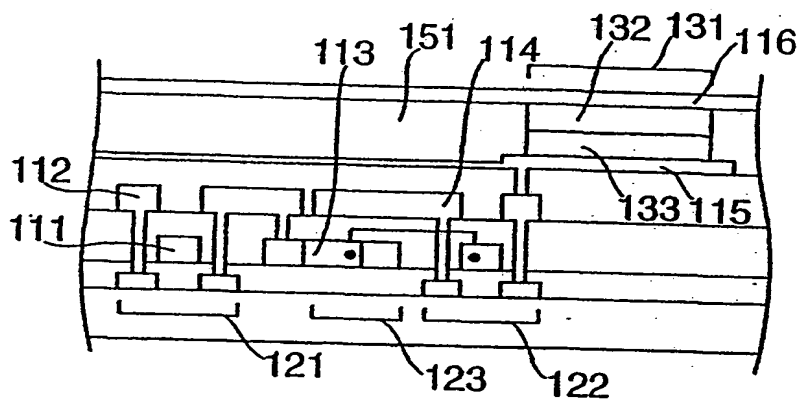


Fig.13.

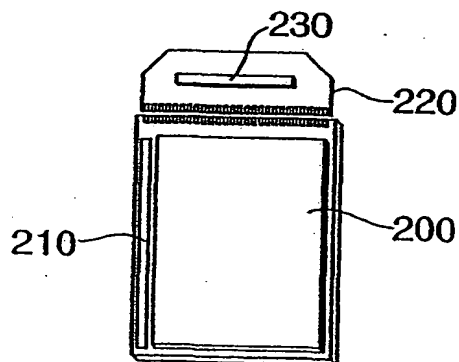
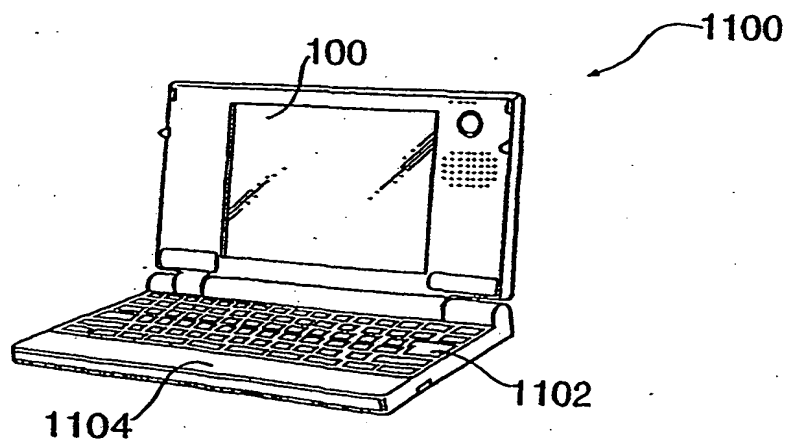


Fig.14.



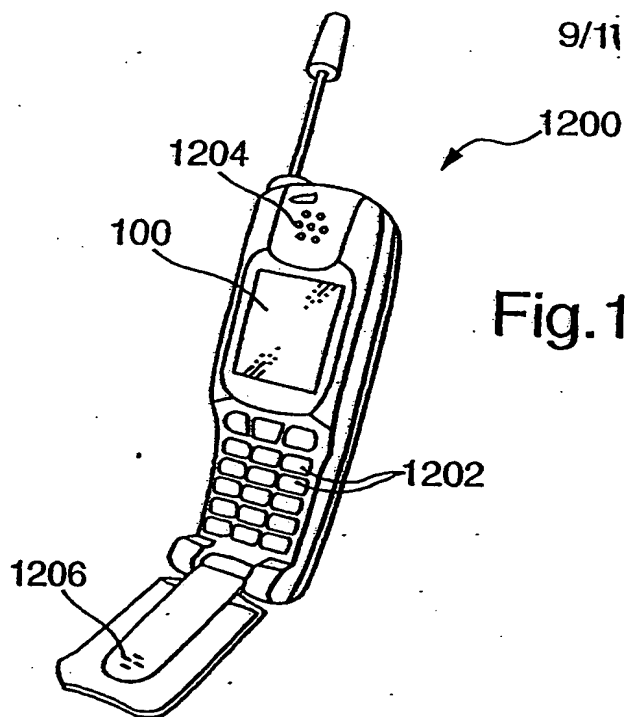


Fig. 15.

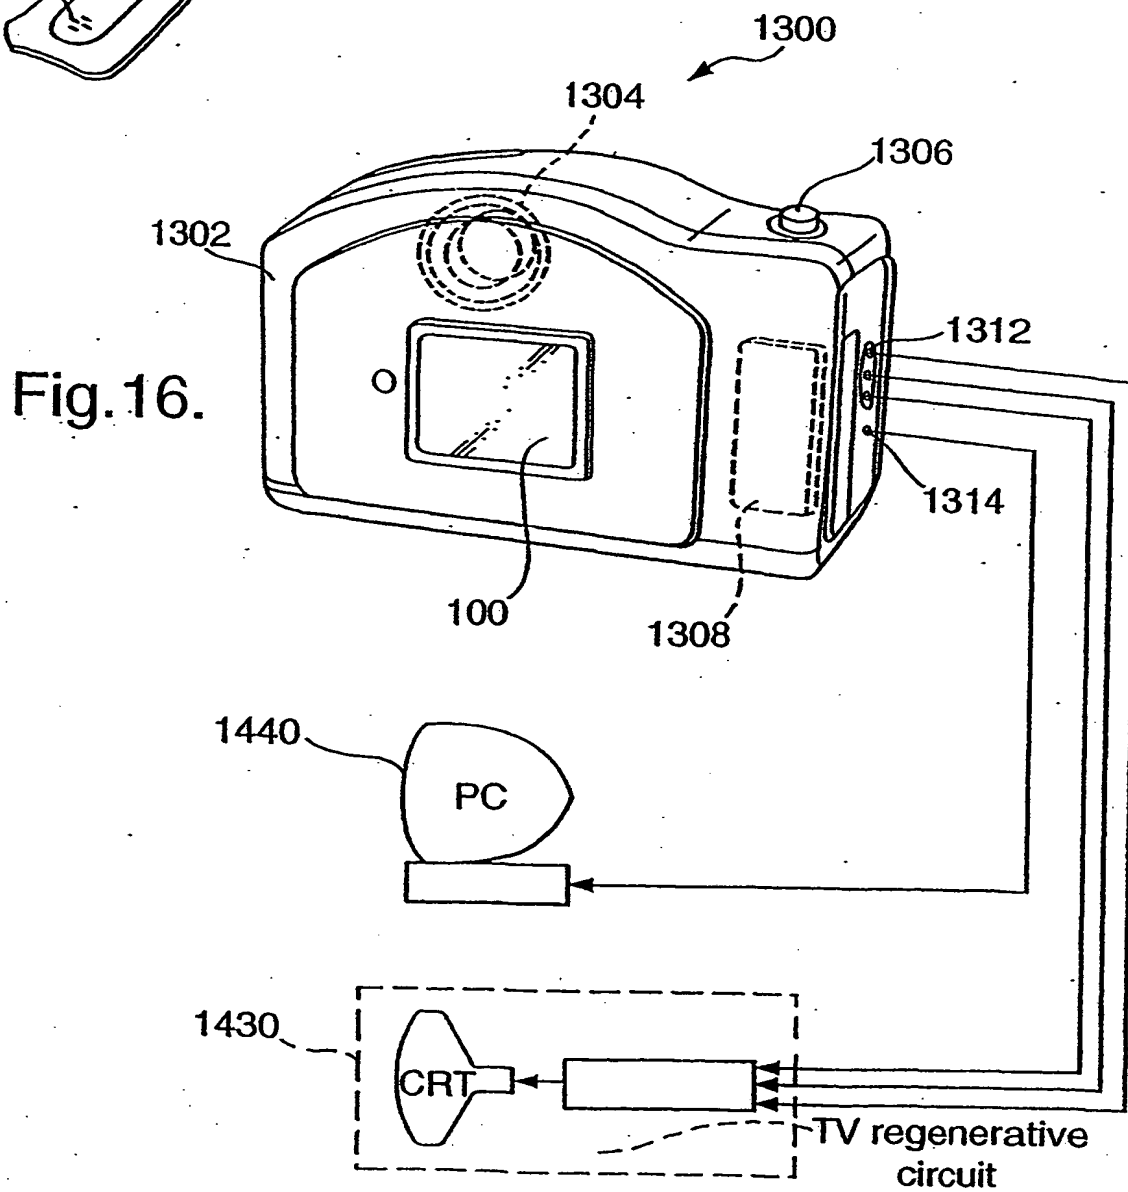


Fig. 16.

10/11.

Fig.17.



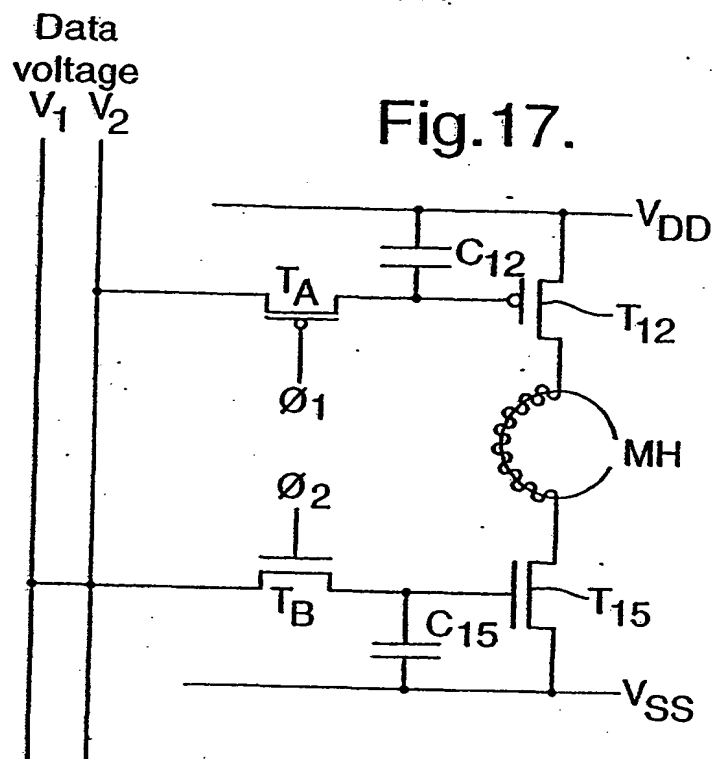


Fig.18.

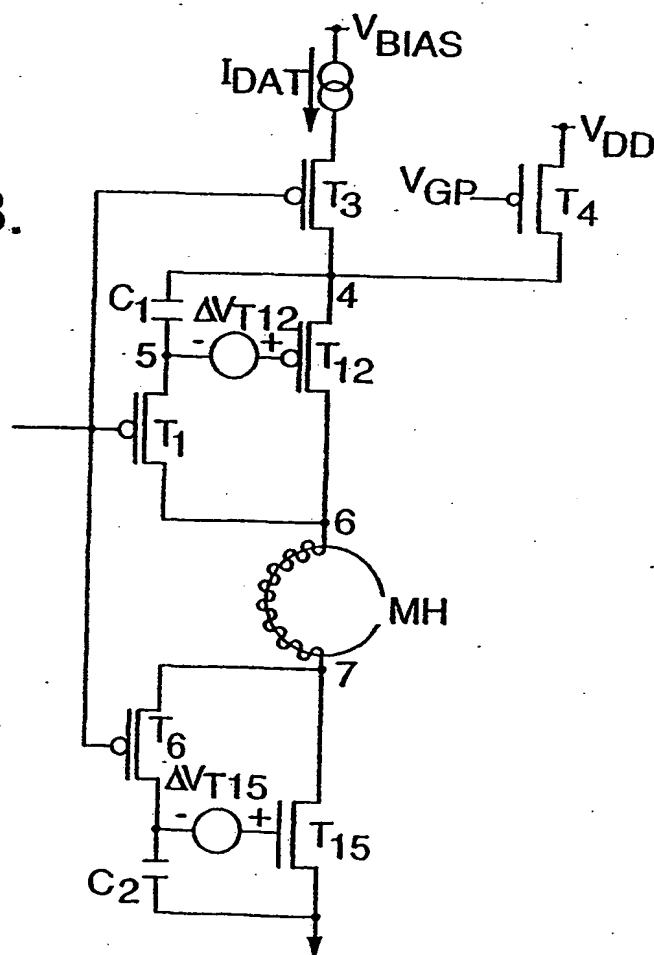

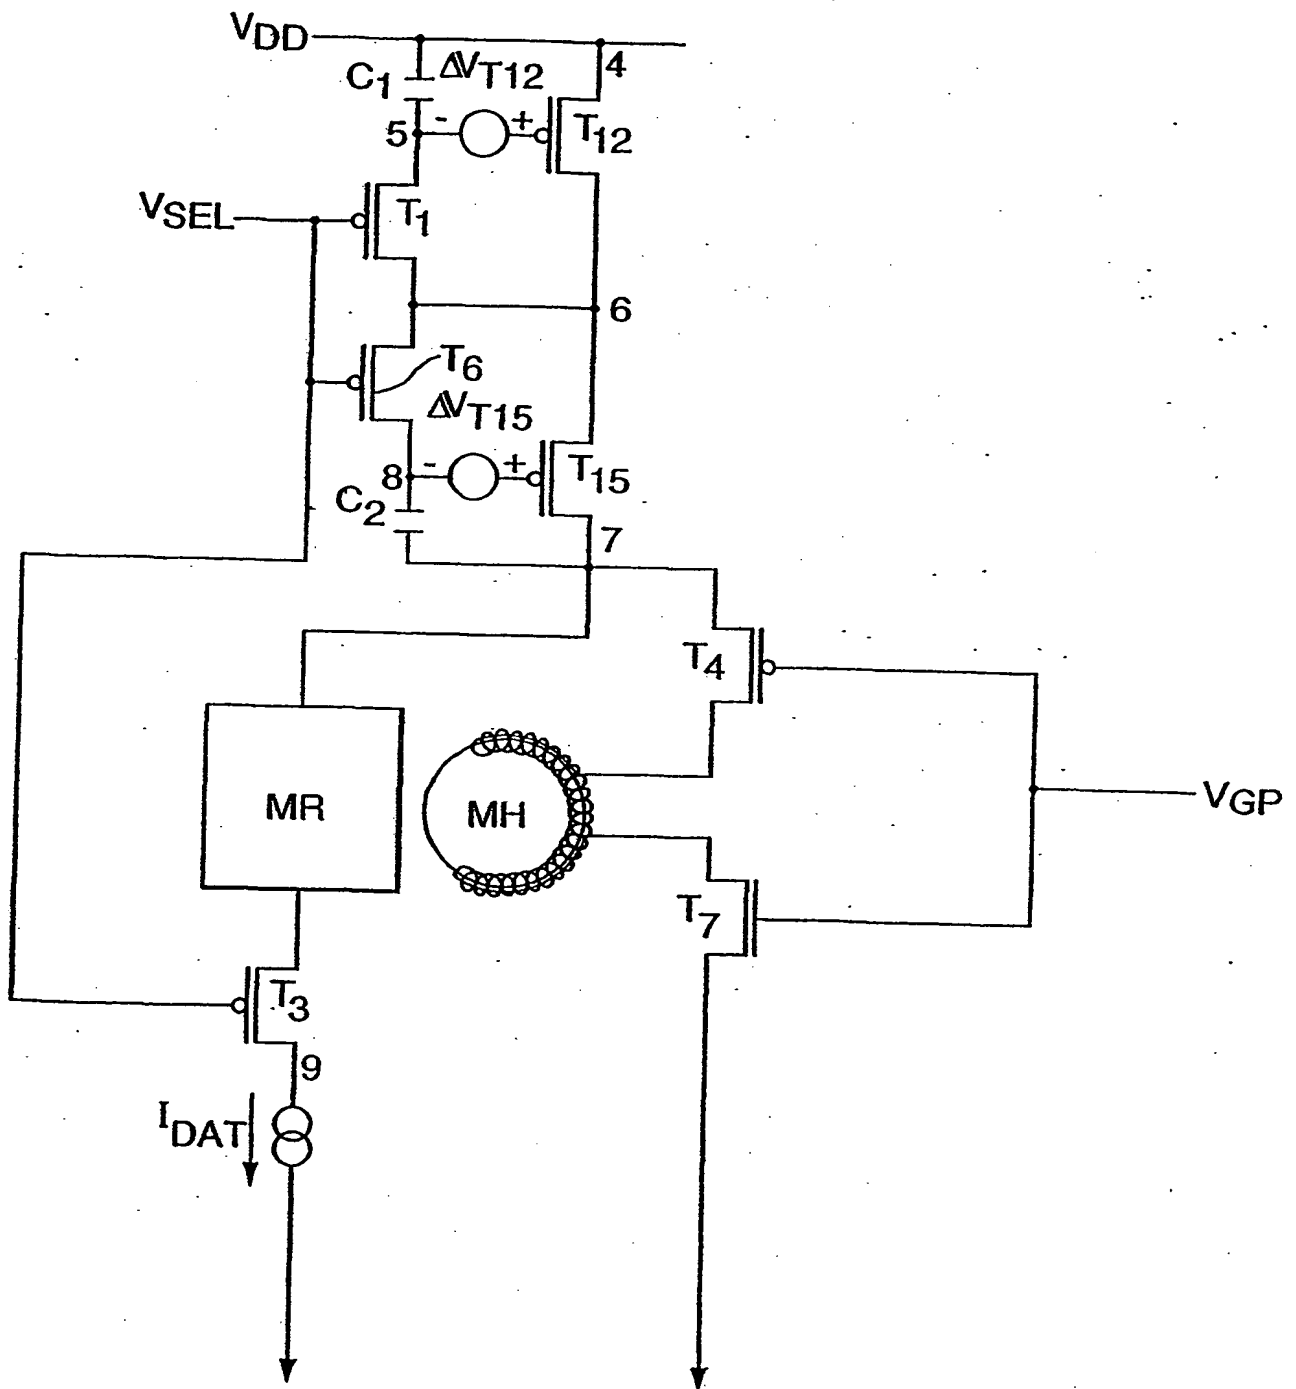

INTERNATIONAL SEARCH REPORT

Int. Application No.

PCT 01/03100

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G09G3/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G09G G11C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 443 151 A (MYERS WILLIAM C ET AL) 6 May 1969 (1969-05-06)	1,12,13, 22-25, 28-32
Y	see abstract column 1, line 12 -column 2, line 15 column 2, line 61 -column 4, line 53; figures 1-4	2,3,14, 15,27
A		20,21,26
X	EP 0 766 221 A (PIONEER ELECTRONIC CORP) 2 April 1997 (1997-04-02) see abstract column 1, line 7 - line 30; figure 10 column 3, line 47 -column 4, line 13; figure 1 column 5, line 6 -column 6, line 21; figures 2,3,9	1,12,13, 19-21
	-/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

G document member of the same patent family

Date of the actual completion of the international search

27 September 2001

Date of mailing of the international search report

05/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer:

Corsi, F

INTERNATIONAL SEARCH REPORT

Int'l Application No

PCT 01/03100

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>EP 0 597 226 A (MOTOROLA INC) 18 May 1994 (1994-05-18)</p> <p>see abstract column 1, line 19 - line 42 column 2, line 1 - line 24 column 2, line 47 -column 3, line 37; figures 1,2 column 4, line 49 -column 6, line 15; figures 4,5</p>	1,12,13, 19, 22-25, 28-30
X	<p>US 5 525 923 A (BIALAS JR JOHN S ET AL) 11 June 1996 (1996-06-11)</p> <p>see abstract column 2, line 41 -column 3, line 2; figure 4</p>	1,13, 22-25, 30,31
Y A	<p>US 6 011 532 A (MISHIMA YASUYOSHI ET AL) 4 January 2000 (2000-01-04)</p> <p>see abstract column 6, line 5 - line 15; figure 5 column 6, line 41 - line 64</p>	2,3,14, 15,27 10,11
A	<p>WO 99 65011 A (KONINKL PHILIPS ELECTRONICS NV ;PHILIPS SVENSKA AB (SE)) 16 December 1999 (1999-12-16)</p> <p>see abstract page 1, line 11 - line 17 page 3, line 24 -page 4, line 11 page 8, line 12 -page 11, line 24; figures 2,3 page 12, line 27 -page 13, line 16; figure 4</p>	4-9,33, 34
X,P	<p>WO 01 26087 A (KONINKL PHILIPS ELECTRONICS NV) 12 April 2001 (2001-04-12)</p> <p>see abstract page 1, line 9 -page 3, line 14 page 8, line 22 -page 9, line 31; figure 5 page 12, line 9 - line 16</p>	1,2, 12-14, 19-21

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT 01/03100

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3443151	A	06-05-1969	US 3409800 A	05-11-1968
EP 0766221	A	02-04-1997	JP 9097925 A	08-04-1997
			DE 69605516 D1	13-01-2000
			DE 69605516 T2	04-05-2000
			EP 0766221 A1	02-04-1997
			US 5793163 A	11-08-1998
EP 0597226	A	18-05-1994	EP 0597226 A1	18-05-1994
			JP 6208342 A	26-07-1994
US 5525923	A	11-06-1996	NONE	
US 6011532	A	04-01-2000	JP 2637835 B2	06-08-1997
			JP 4014091 A	20-01-1992
			JP 2597034 B2	02-04-1997
			JP 4014092 A	20-01-1992
			JP 2516462 B2	24-07-1996
			JP 4102825 A	03-04-1992
			US 5432527 A	11-07-1995
			DE 69112698 D1	12-10-1995
			DE 69112698 T2	15-02-1996
			EP 0456453 A2	13-11-1991
			KR 9405240 B1	15-06-1994
			US 5515072 A	07-05-1996
WO 9965011	A	16-12-1999	EP 1034530 A2	13-09-2000
			WO 9965011 A2	16-12-1999
WO 0126087	A	12-04-2001	WO 0126087 A1	12-04-2001
			EP 1135764 A1	26-09-2001

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.